



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

| | | |
|---|------------------|---|
| <p>(51) International Patent Classification 7 : A61J 3/00</p> | <p>A2</p> | <p>(11) International Publication Number: WO 00/54724</p> <p>(43) International Publication Date: 21 September 2000 (21.09.00)</p> |
| <p>(21) International Application Number: PCT/EP00/02222</p> <p>(22) International Filing Date: 14 March 2000 (14.03.00)</p> <p>(30) Priority Data: FI99A000052 16 March 1999 (16.03.99) IT</p> <p>(71) Applicant: MOLTENI L. E C. DEI FRATELLI ALITTI SOCIETA' DI ESERCIZIO S.P.A. [IT/IT]; Strada Statale 67, Tosco Romagnola, Località Granatieri, I-5018 Scandicci (IT).</p> <p>(72) Inventor: ANGELI, Roberto; Via dell'Acciaio 44, I-50018 Scandicci (IT).</p> <p>(74) Agent: GERVASI, Gemma; Notarbartolo & Gervasi S.p.A., Corso di Porta Vittoria, 9, I-20122 Milan (IT).</p> | | <p>(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).</p> <p>Published Without international search report and to be republished upon receipt of that report.</p> |
| <p>(54) Title: PRECISION DISPENSER FOR LIQUIDS</p> <div data-bbox="370 1144 1242 1711"> </div> <p>(57) Abstract</p> <p>A precision dispenser for liquids consisting of: a first pump (2) fed by a flask (1) containing liquid, connected thereto via an attachment (13) provided with a suction tube (16); an intermediate reservoir (3) fed by the first pump (2) and provided with one or more level probes (31-33); a second, high-precision, pump (4) downstream of said reservoir (3); a three-way solenoid valve (5) set downstream of the pump (4), from which it receives the liquid at input, and having two output ways, one output leading to the reservoir (3) and the other leading to a final receptacle (6) for collecting the liquid delivered; and a microprocessor unit for control and management of the pumps (2, 4), probes (31-33) and maintenance functions.</p> | | |

BEST AVAILABLE COPY

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

| | | | | | | | |
|----|--------------------------|----|--|----|--|----|--------------------------|
| AL | Albania | ES | Spain | LS | Lesotho | SI | Slovenia |
| AM | Armenia | FI | Finland | LT | Lithuania | SK | Slovakia |
| AT | Austria | FR | France | LU | Luxembourg | SN | Senegal |
| AU | Australia | GA | Gabon | LV | Latvia | SZ | Swaziland |
| AZ | Azerbaijan | GB | United Kingdom | MC | Monaco | TD | Chad |
| BA | Bosnia and Herzegovina | GE | Georgia | MD | Republic of Moldova | TG | Togo |
| BB | Barbados | GH | Ghana | MG | Madagascar | TJ | Tajikistan |
| BE | Belgium | GN | Guinea | MK | The former Yugoslav Republic of Macedonia | TM | Turkmenistan |
| BF | Burkina Faso | GR | Greece | | | TR | Turkey |
| BG | Bulgaria | HU | Hungary | ML | Mali | TT | Trinidad and Tobago |
| BJ | Benin | IE | Ireland | MN | Mongolia | UA | Ukraine |
| BR | Brazil | IL | Israel | MR | Mauritania | UG | Uganda |
| BY | Belarus | IS | Iceland | MW | Malawi | US | United States of America |
| CA | Canada | IT | Italy | MX | Mexico | UZ | Uzbekistan |
| CF | Central African Republic | JP | Japan | NE | Niger | VN | Viet Nam |
| CG | Congo | KE | Kenya | NL | Netherlands | YU | Yugoslavia |
| CH | Switzerland | KG | Kyrgyzstan | NO | Norway | ZW | Zimbabwe |
| CI | Côte d'Ivoire | KP | Democratic People's Republic of Korea | NZ | New Zealand | | |
| CM | Cameroon | | | PL | Poland | | |
| CN | China | KR | Republic of Korea | PT | Portugal | | |
| CU | Cuba | KZ | Kazakhstan | RO | Romania | | |
| CZ | Czech Republic | LC | Saint Lucia | RU | Russian Federation | | |
| DE | Germany | LI | Liechtenstein | SD | Sudan | | |
| DK | Denmark | LK | Sri Lanka | SE | Sweden | | |
| EE | Estonia | LR | Liberia | SG | Singapore | | |

PRECISION DISPENSER FOR LIQUIDS

Field of the invention and prior art

The present invention regards a precision dispenser for controlled delivery of liquid products, in particular methadone or other medicinal preparations.

5 In the current state of the art, dispensers of liquid methadone are known in which a pre-set amount of liquid is taken from a feed reservoir by means of a peristaltic pump. The dose of liquid is then poured into a glass to be taken by the patient.

These known dispensers are moreover generally managed by a computer for identification and management of the administrations envisaged for the various
10 patients.

However, the known dispensers present a number of drawbacks linked in particular to the precision that they are able to provide in dosing, this aspect being of particular consequence in the administration of methadone, both on account of the importance and delicacy of the cases treated, and on account of the need for
15 being able to certify exactly the amounts of methadone actually supplied.

Scope of the invention

A prime purpose of the present invention is therefore to provide a dispenser for liquid products, and in particular methadone, that affords high precision both in dosing and in calculating the quantities handled during operation.

20 Summary of the invention

The above purpose has been achieved according to the invention with a dispenser of liquid methadone, in which the hydraulic circuit comprises a sector for circulation of the liquid handled. The circulation makes it possible to set initial conditions that can be repeated in an identical manner at each new delivery. The
25 circuit is moreover provided with an intermediate reservoir which is distinct from the supply flask and serves as a bleeder for possible air bubbles and has a check point for checking the amount of liquid present in the circuit, as well as for checking the temperature conditions.

The hydraulic circuit according to the invention comprises a first pump, preferably
30 a peristaltic pump, which is fed by an interchangeable flask containing liquid and sends the liquid on to an intermediate reservoir. The output of the latter is connected, via a manual valve, to a second, high-precision, pump, preferably of

the piston type, and subsequently to a three-way solenoid valve, which has one output connected to the intermediate reservoir and the other output connected to the final receptacle of the amount of liquid to be delivered. The intermediate reservoir is equipped with level probes, and possibly with a temperature probe.

- 5 A first advantage is represented by the high precision achievable and the assurance of being able to repeat delivery of liquid with identical circuit starting conditions.

A second advantage is represented by the possibility of maintaining the liquid in movement when the device is not in use, so preventing any possible precipitation
10 or separation of various phases.

These and other advantages will emerge more clearly from the ensuing description and from the annexed drawings, which are provided as a non-limiting example.

Brief description of the drawings

- 15 - Figure 1 shows a diagram of the dispenser according to the invention;
- Figures 2.1, 2.2, 2.3, and 2.4 present a flowchart showing the various phases of the method according to the invention, in which P1 stands for Peristaltic pump, P2 stands for Piston pump, EV stands for Solenoid valve, S2 stands for Intermediate tank, M2 stands for Maximum level of S2. In particular, figures 2.1 and 2.2 relate to
20 the filling and maintenance of level in intermediate reservoir (Routine 01) and figures 2.3 and 2.4 relate to the charging of circuit of main pump (Routine 02); and
- Figures 3a and 3b present, respectively, a side view and a top view of a flask for the apparatus of Figure 1.

Detailed description of the invention

- 25 With reference to the attached figures, a dispenser according to the invention is made up of:
- a first pump 2, for example a peristaltic pump, fed, via pipes 12, by an interchangeable flask 1 containing liquid;
 - an intermediate reservoir 3 fed, via pipes 21, by the first pump 2 and provided
30 with one or more level probes 31-33, and possibly a temperature probe 34;
 - a second, high-precision, pump 4, preferably of the type with one or more pistons, fed, via pipes 35 and valve 7, by the said reservoir 3;

- a three-way valve 5, set downstream of the pump 4, from which it receives the liquid at input, and having two output ways, one output leading, via pipes 51, to the reservoir 3, and the other leading, via further pipes 52, to a final receptacle 6 for collecting the liquid to be delivered; and
- 5 - a microprocessor unit for control and management of the pumps 2, 4, of the maintenance functions and of the probes 31-34.

According to the invention, and as may be seen from the attached drawings, the part of the hydraulic circuit between the reservoir 3 and the solenoid valve 5 makes up a circulation circuit H, in which the liquid can be made to circulate by
10 means of the pump 4 and the three-way valve 5.

During operation, the pump 2 sucks up liquid from the flask 1 and sends it into the reservoir 3 until an appropriate level is reached (which is subsequently maintained), this being detected by the probes 31-33. If the level is sufficient, the pump 4 starts to circulate the liquid until it ensures complete filling of the pipes.

- 15 At the first request for delivery, the control unit opens the valve 5 for delivery (hence, of course, closing the circulation way) for the period of delivery of the amount of liquid required.

Advantageously, in the example described the pump is a piston-type pump (TRAVCYL[®], MODEL 16, manufactured by Encynova International Inc.), which is
20 operated by a stepper motor and in which, at every cycle of known duration, the amount of liquid displaced is known exactly.

In the event of pauses in use between successive deliveries that might cause changes in the state of the liquid or deviations with respect to the pre-set start-of-delivery conditions, the pump 4 carries out a predetermined number of cycles.

- 25 In order to guarantee the exact repetition of each delivery, the pump 4 is moreover provided with means for the determination of an initial zero, from which to start measurement of the amount being delivered. According to the invention, the pump 4 is then reset at each delivery and is brought back to a start-of-delivery position.

The above-mentioned means consist of an electromagnetic proximity sensor
30 which acts as reference for the stroke of the pump piston and which controls advance of the stepper motor.

In the case where the dispenser is to be used for delivery of liquid methadone, it is

particularly important to guarantee complete delivery of the liquid contained in the flasks and, in addition, to ensure that it is possible to check also management of the flasks with certainty.

With reference to Figures 3a and 3b, the flasks according to the invention consist
5 of a main body 1 provided with a threaded neck 8 for connection to a seal-type packing plug. The neck is moreover provided with teeth 81 for the bayonet joint of a coupling 13 for connection with the hydraulic circuit of the apparatus.

The bottom of the flask consists of a pair of surfaces 9, 91, which are slightly inclined and which converge into a hemispherical cup 93 which forms the lowest
10 point of storage of the liquid in the flask.

A fin 92 is provided underneath the surface 9 to guarantee horizontal support for the flask in its housing on the apparatus.

In order to ensure that the suction tube 16 always draws from the minimum-level point of the cup 93, the tube is advantageously made so that it is integral with the
15 attachment 13, which in turn finds a secure top reference point in the bayonet connection.

The flask 1 is further equipped with means of identification 12, which may be read by appropriate sensors 14 of the dispenser.

In a preferred embodiment, the said means 12 are of the RFID radio-frequency
20 type, according to a recognition technique which is in itself already known, whilst the corresponding sensors 13 are fixed to the apparatus and connected to the control unit of the apparatus, which checks the volumes and the destination of the amounts delivered.

With reference to Figures 2.1 – 2.4, the invention further comprises a method for
25 precision dosing of liquids, in particular by means of a dispenser of the type described above.

The method comprises the following steps:

- check of the control probes and sensors of the dispenser;
- charging, for example by means of a peristaltic pump fed by a flask containing
30 the liquid to be delivered, of an intermediate reservoir S2 up to a maximum level M2 (routine 01) detected by a level probe;
- charging of a circulation circuit operated by a main pump P2 (routine 02), for

example of the piston type, the circuit extending from the reservoir S2 up to a delivery valve EV;

- in the case of a command for first delivery, charging of the spout of the flask for feeding the liquid, and search for a zero point of the pump; for subsequent
5 deliveries with the same flask, search for the zero point of the pump;
- opening of the delivery valve EV and operation of the pump P2;
- execution of routine 01 for check on level of the reservoir S2;
- check on the amount delivered: if it corresponds to the amount envisaged, interruption of delivery and closing of the delivery valve EV; and
10 - waiting for new command for delivery.

In addition, in the event of prolonged inactivity between successive deliveries, according to the method the circulation routine 02 is carried out to prevent any possible modifications in the state of the liquid (separation of phases, formation of air bubbles, etc.) present in the circuit of the pump 4.

- 15 The present invention has been described with reference to a preferred embodiment thereof, but it is understood that equivalent modifications may be made by a person skilled in the branch without thereby departing from the sphere of protection granted to the present patent for industrial invention.

CLAIMS

- 1 1. A precision dispenser for liquids consisting of:
 - 2 - a first pump (2), fed by a flask (1) containing liquid, connected by means of an
 - 3 attachment (13) provided with a suction tube (16);
 - 4 - an intermediate reservoir (3) fed by the first pump (2) and provided with one or
 - 5 more level probes (31-33);
 - 6 - a second, high-precision, pump (4) downstream of said reservoir 3;
 - 7 - a three-way solenoid valve (5), set downstream of the pump (4), from which it
 - 8 receives the liquid at input, and having two output ways, one output leading to the
 - 9 reservoir (3), and the other leading to a final receptacle (6) for collecting the liquid
 - 10 to be delivered; and
 - 11 - a microprocessor unit for control and management of the pumps (2, 4), of the
 - 12 probes (31-34) and of the maintenance functions.
- 1 2. A dispenser according to Claim 1, characterized in that the part of the hydraulic
- 2 circuit between the reservoir (3) and the solenoid valve (5) forms a circulation
- 3 circuit H in which the liquid can be circulated by means of the pump (4) and the
- 4 three-way valve (5).
- 1 3. A dispenser according to Claim 2, characterized in that the pump (4) is of the
- 2 type with one or more pistons, operated by a stepper motor.
- 1 4. A dispenser according to Claim 1, characterized in that it comprises means for
- 2 seeking a zero point of start of each delivery of the pump (4).
- 1 5. A dispenser according to Claim 4, characterized in that the said means are
- 2 constituted by a proximity sensor capable of detecting the position of the pistons of
- 3 the pump and controlling advance of the stepper motor.
- 1 6. A dispenser according to Claim 1, characterized in that it comprises means (14)
- 2 for identifying the flask of liquid used.
- 1 7. A dispenser according to Claim 6, characterized in that the said means are
- 2 RFID sensors.
- 1 8. A dispenser according to Claim 1, characterized in that it comprises a
- 2 temperature probe (34).
- 1 9. A dispenser according to Claim 1, characterized in that the said suction tube

2 (16) is integral with the said attachment (13).

1 10. A flask for liquids, for use in dispensers according to at least one of Claims 1-
2 9, characterized in that it consists of a main body (1) provided with a threaded
3 neck (8) equipped with means (81) for the press-block coupling of an attachment
4 (13) of a dispenser, in which the bottom of the flask consists of a pair of surfaces
5 (9, 91), which are inclined and which converge centrally into a cup (93) forming the
6 lowest point of storage of the liquid in the flask (1).

1 11. A flask according to Claim 10, characterized in that the said means (81)
2 consists of a bayonet coupling.

1 12. A flask according to Claim 10, characterized in that a fin (92) is provided
2 underneath the surface (9) to guarantee horizontal support for the flask in its
3 housing on the dispenser.

1 13. A flask according to Claim 10, characterized in that it is equipped with means
2 of identification (12), which may be read by appropriate means (14) of the
3 dispenser.

1 14. A flask according to Claim 13, characterized in that the said means (12) are of
2 the RFID type.

1 15. A flask according to Claim 10, characterized in that it is made of plastic
2 material.

1 16. A method for dosing liquids, comprising the following steps:

- 2 - check of the control probes and sensors of the dispenser;
- 3 - charging, for example by means of peristaltic pump fed by a flask containing the
4 liquid to be delivered, of an intermediate reservoir S2 up to a maximum level M2
5 (routine 01) detected by a level probe;
- 6 - charging of a circulation circuit operated by a main pump P2 (routine 02), for
7 example of the piston type, the circuit extending from the reservoir S2 up to a
8 multi-way delivery valve EV;
- 9 - in the case of a command for first delivery, charging of the spout of the flask for
10 feeding the liquid, and search for a zero point of the pump; for subsequent
11 deliveries with the same flask, search for the zero point of the pump;
- 12 - opening of the delivery valve EV and operation of the pump P2;
- 13 - execution of routine 01 for check on level of the reservoir S2;

- 14 - check on the amount delivered: if it corresponds to the amount envisaged,
15 interruption of delivery and closing of the delivery valve EV; and
16 - waiting for new command for delivery.
- 1 17. Method according to Claim 16, in which in the event of prolonged inactivity
2 between successive deliveries, the circulation routine 02 is carried out to prevent
3 any possible modifications in the state of the liquid present in the circuit of the
4 pump 4.

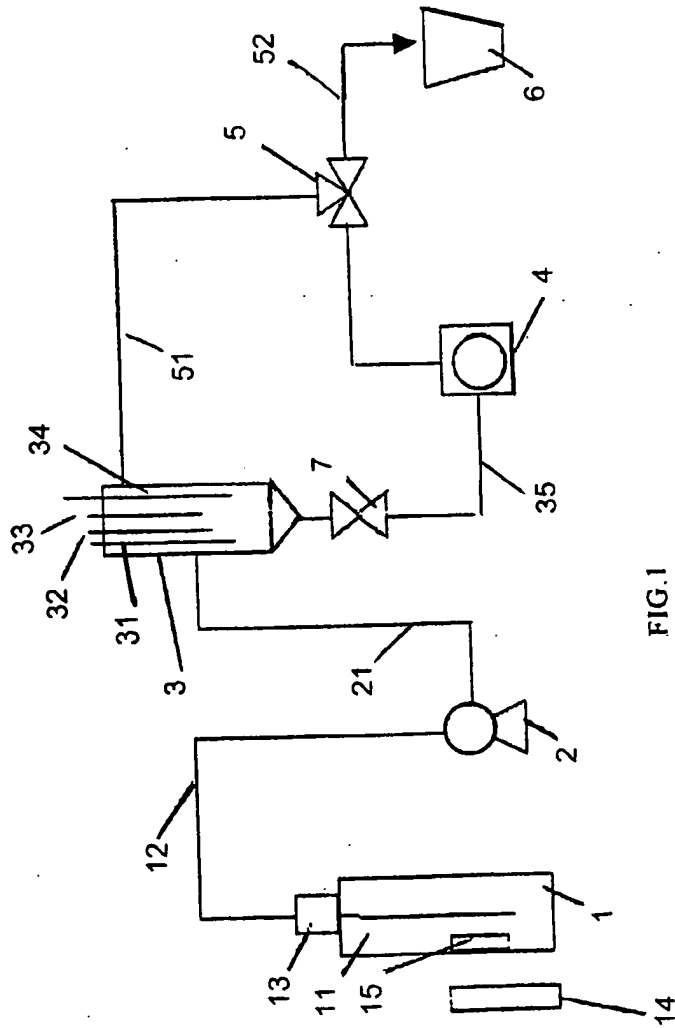


FIG.1

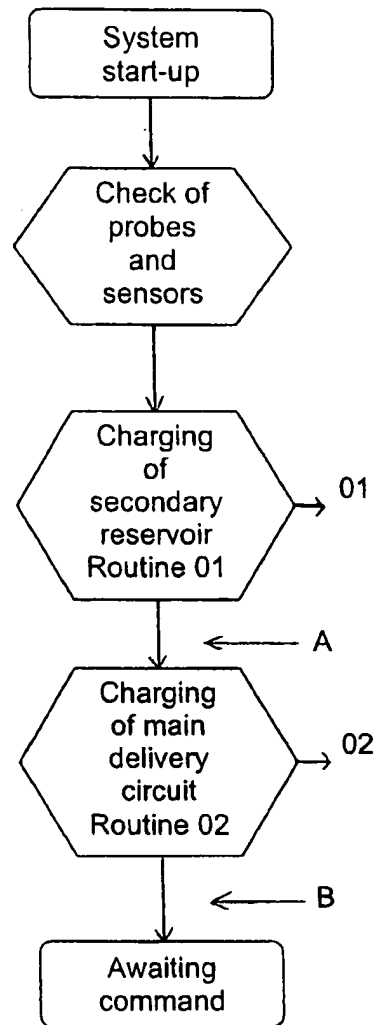


Figure 2.1

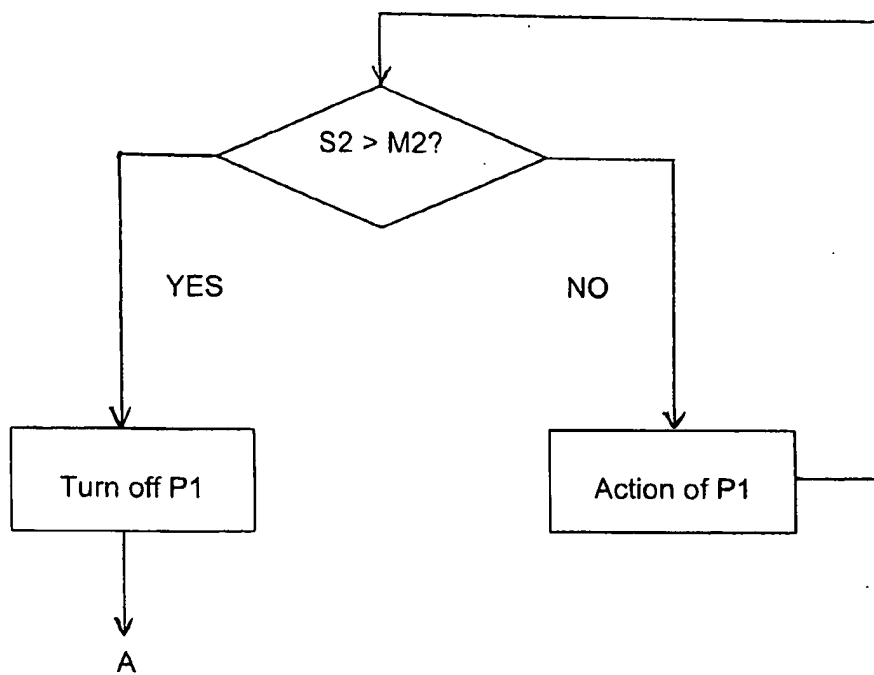


Figure 2.2

4/6

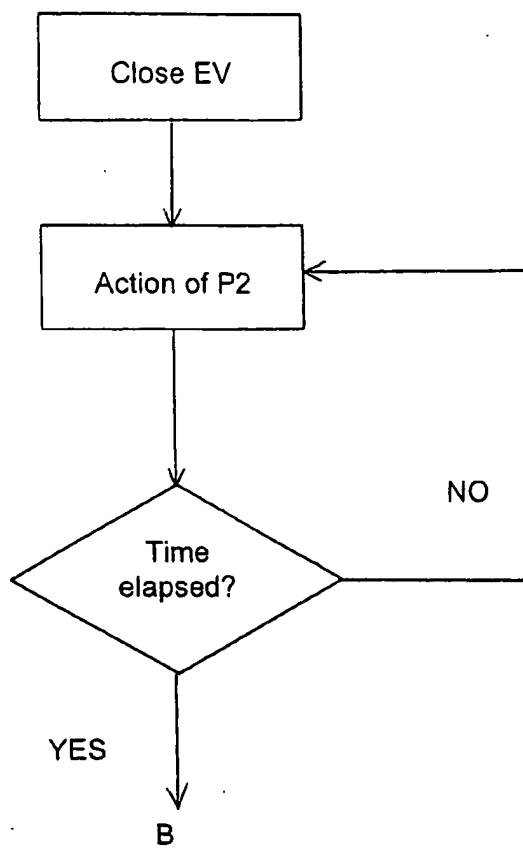


Figure 2.3

5/6



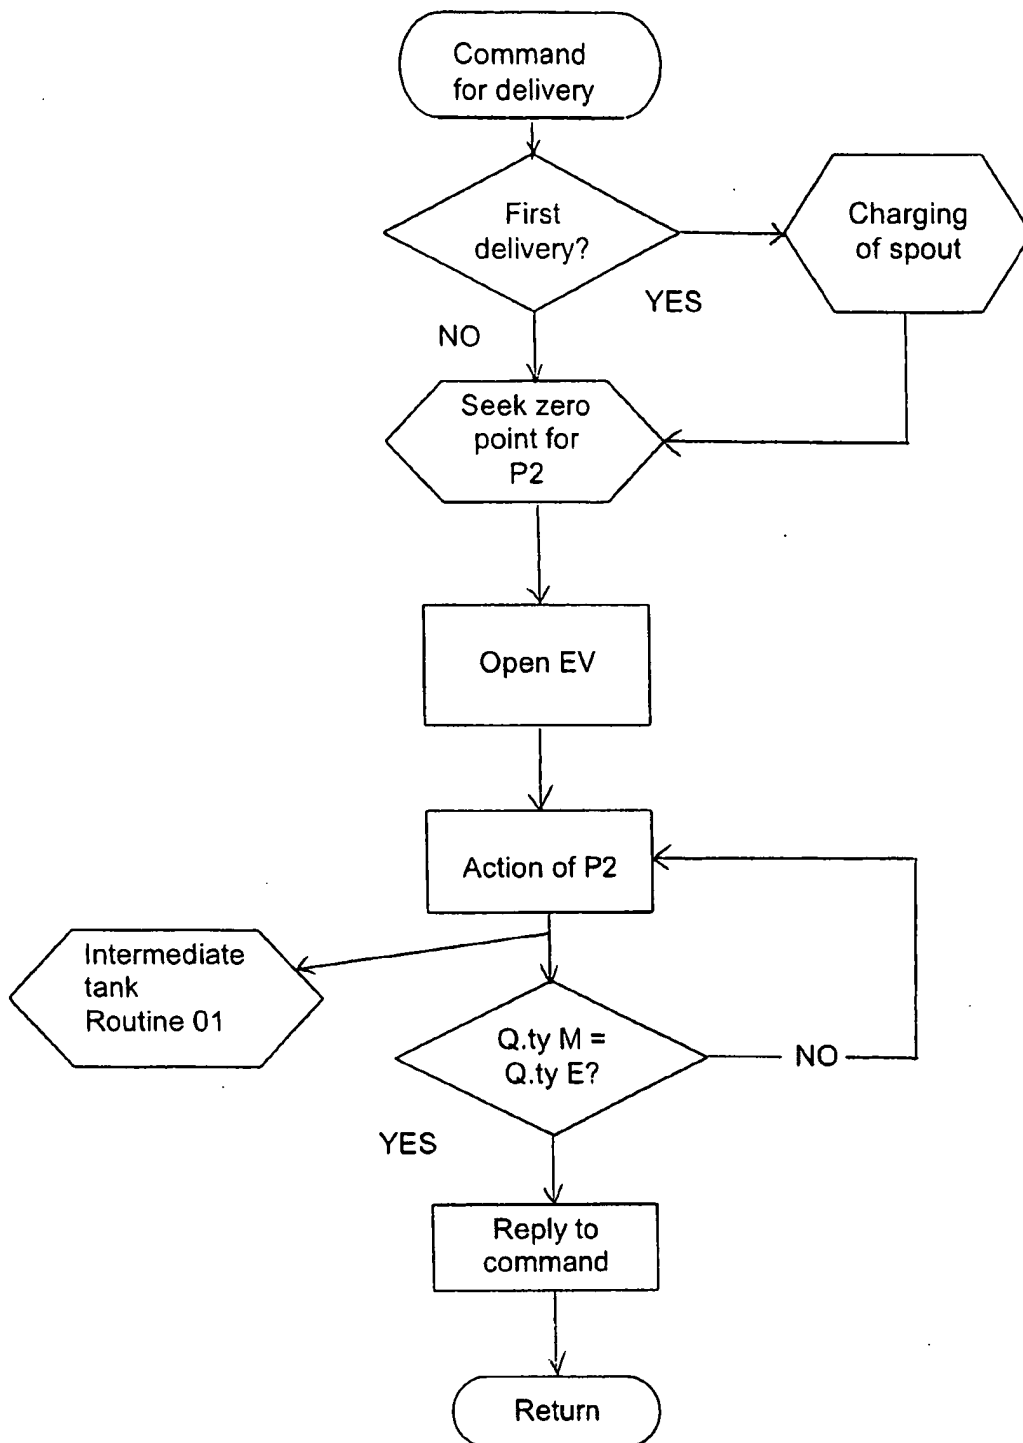


Figure 2.4

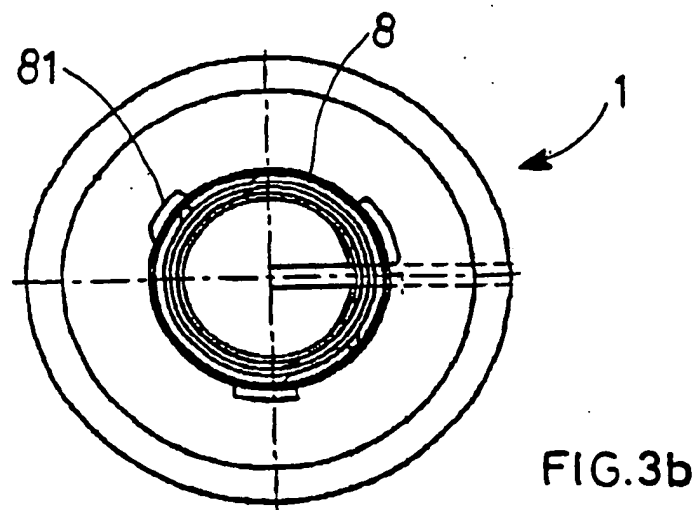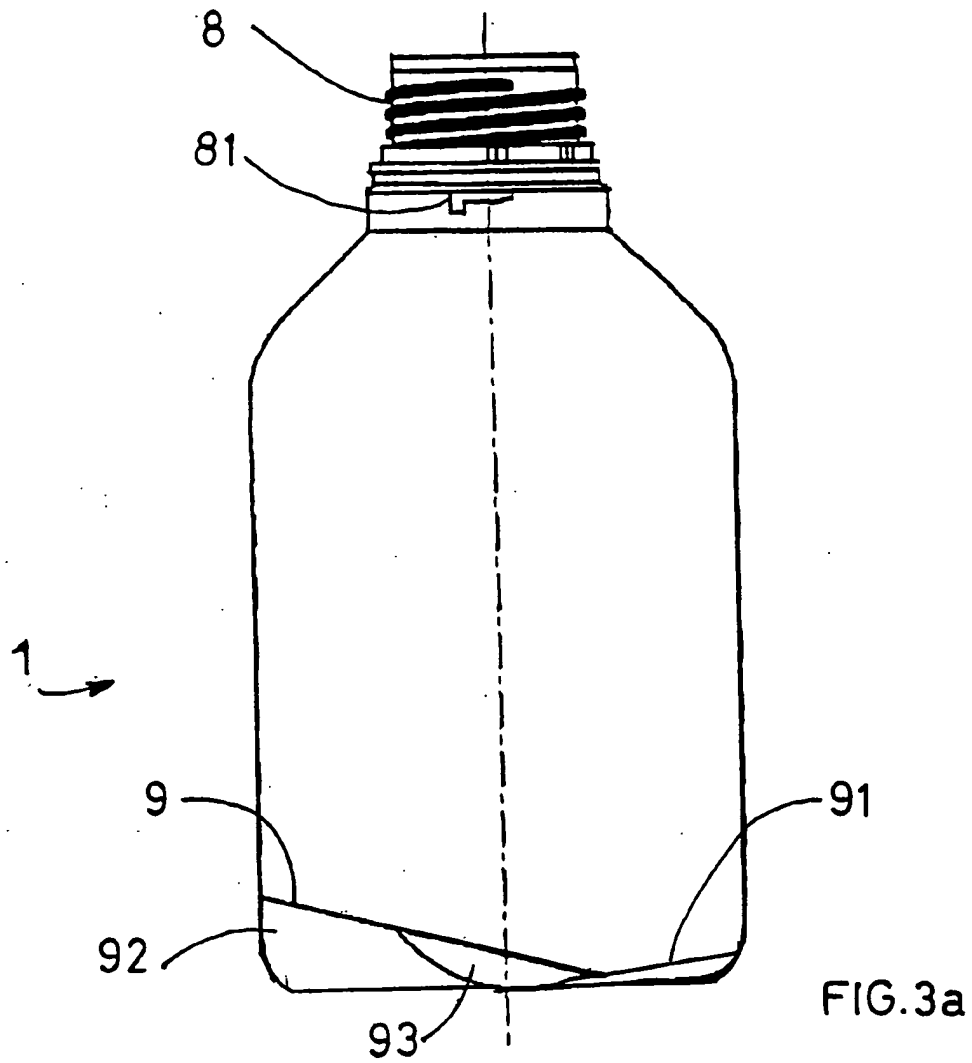

DERWENT-ACC-NO: 2000-602047

DERWENT-WEEK: 200249

COPYRIGHT 1999 DERWENT INFORMATION LTD

TITLE: Precision dispenser for methadone, comprises a first pump supplying liquid from flask to reservoir and high precision pump circulating liquid from reservoir through loop with take-off to receptacle

INVENTOR: ANGELI, R

PATENT-ASSIGNEE: MOLteni & C FRAT ALITTI SOC ESERCIZIO SP[MOLTN]

PRIORITY-DATA: 1999IT-FI00052 (March 16, 1999)

PATENT-FAMILY:

| PUB-NO | PUB-DATE | LANGUAGE | PAGES | MAIN-IPC |
|-----------------|--------------------|----------|-------|-------------|
| WO 200054724 A2 | September 21, 2000 | E | 016 | A61J 003/00 |
| HU 200200364 A2 | May 28, 2002 | N/A | 000 | A61J 003/00 |
| AU 200038109 A | October 4, 2000 | N/A | 000 | A61J 003/00 |
| EP 1165010 A2 | January 2, 2002 | E | 000 | A61J 003/00 |
| SK 200101300 A3 | January 7, 2002 | N/A | 000 | A61J 003/00 |
| CZ 200103109 A3 | January 16, 2002 | N/A | 000 | A61J 003/00 |
| BR 200008981 A | January 22, 2002 | N/A | 000 | A61J 003/00 |
| IT 1308253 B | December 10, 2001 | N/A | 000 | B67D 000/00 |
| CN 1345218 A | April 17, 2002 | N/A | 000 | A61J 003/00 |

DESIGNATED-STATES: AE AL AM AT AU AZ BA BB BG BR BY CA CH CN CR
CU CZ DE DK DM
DZ EE ES FI GB GD GE GH GM HR HU ID IL IN IS JP KE KG KP KR KZ LC LK
LR LS LT
LU LV MA MD MG MK MN MW MX NO NZ PL PT RO RU SD SE SG SI SK SL TJ
TM TR TT TZ
UA UG UZ VN YU ZA ZW AT BE CH CY DE DK EA ES FI FR GB GH GM GR IE
IT KE LS LU
MC MW NL OA PT SD SE SL SZ TZ UG ZW AL AT BE CH CY DE DK ES FI FR
GB GR IE IT

LI LT LU LV MC MK NL PT RO SE SI

APPLICATION-DATA:

| PUB-NO | APPL-DESCRIPTOR | APPL-NO | APPL-DATE |
|----------------|-----------------|----------------|----------------|
| WO 200054724A2 | N/A | 2000WO-EP02222 | March 14, 2000 |
| HU 200200364A2 | N/A | 2000WO-EP02222 | March 14, 2000 |
| HU 200200364A2 | N/A | 2002HU-0000364 | March 14, 2000 |
| HU 200200364A2 | Based on | WO 200054724 | N/A |
| AU 200038109A | N/A | 2000AU-0038109 | March 14, 2000 |
| AU 200038109A | Based on | WO 200054724 | N/A |
| EP 1165010A2 | N/A | 2000EP-0916935 | March 14, 2000 |
| EP 1165010A2 | N/A | 2000WO-EP02222 | March 14, 2000 |
| EP 1165010A2 | Based on | WO 200054724 | N/A |
| SK 200101300A3 | N/A | 2000WO-EP02222 | March 14, 2000 |
| SK 200101300A3 | N/A | 2001SK-0001300 | March 14, 2000 |
| SK 200101300A3 | Based on | WO 200054724 | N/A |
| CZ 200103109A3 | N/A | 2000WO-EP02222 | March 14, 2000 |
| CZ 200103109A3 | N/A | 2001CZ-0003109 | March 14, 2000 |
| CZ 200103109A3 | Based on | WO 200054724 | N/A |
| BR 200008981A | N/A | 2000BR-0008981 | March 14, 2000 |
| BR 200008981A | N/A | 2000WO-EP02222 | March 14, 2000 |
| BR 200008981A | Based on | WO 200054724 | N/A |
| IT 1308253B | N/A | 1999IT-FI00052 | March 16, 1999 |
| CN 1345218A | N/A | 2000CN-0805062 | March 14, 2000 |

INT-CL (IPC): A61J003/00, B67D000/00

ABSTRACTED-PUB-NO: WO 200054724A

BASIC-ABSTRACT:

NOVELTY - A precision dispenser comprising a first pump supplying liquid from a flask to an intermediate reservoir with level probes, a second high precision pump delivering liquid from the reservoir to a three-way solenoid valve having an outlet leading back to the reservoir and another outlet to a final receptacle, is new. The pumps and probes are managed by a microprocessor unit.

DETAILED DESCRIPTION - INDEPENDENT CLAIMS are also included for the following:

(1) a flask for use in the above dispenser comprising a threaded neck for coupling with a press-block coupling of the dispenser, the bottom of the flask

has a pair of surfaces converging centrally into a cup at the lowest point of the flask; and

(2) a method for dosing liquids using a dispenser as above where the first peristaltic pump fills the reservoir to a maximum level detected by a probe and the second piston pump charges a liquid recirculation circuit, the second pump is moved to its zero point, the solenoid valve opens to direct liquids to a receptacle, and the valve closes when the desired amount has been delivered.

USE - The dispenser is useful for dispensing liquids such as methadone.

ADVANTAGE - The dispenser is very precise and calculates the quantities handled during its operation.

DESCRIPTION OF DRAWING(S) - The drawing shows a liquid dispenser

interchangeable flask 1

pumps 2,4

reservoir 3

three-way valve 5

receptacle 6

valve 7

bayonet coupling 13

RFID sensors 14

flask identifier 15

pipes 12,21,35,51,52

level probes 31,32,33

temperature probe 34

CHOSEN-DRAWING: Dwg.1/3

TITLE-TERMS: PRECISION DISPENSE METHADONE COMPRISE FIRST PUMP

SUPPLY LIQUID

FLASK RESERVOIR HIGH PRECISION PUMP CIRCULATE LIQUID
RESERVOIR
THROUGH LOOP RECEPTACLE

DERWENT-CLASS: B05 B07 P33 Q39

CPI-CODES: B10-B04B; B11-C03;

CHEMICAL-CODES:

Chemical Indexing M2 *01*

Fragmentation Code

G010 G019 G100 H1 H103 H181 J5 J581 M1 M121

M132 M150 M210 M211 M212 M262 M273 M281 M282 M314

M321 M331 M344 M371 M391 M414 M424 M510 M520 M532

M540 M740 M781 M904 M905 M910 N103 R023

Specific Compounds

00408K 00408U

Registry Numbers

0408U

Chemical Indexing M6 *02*

Fragmentation Code

M905 R023 R760

UNLINKED-DERWENT-REGISTRY-NUMBERS: 0408U

SECONDARY-ACC-NO:

CPI Secondary Accession Numbers: C2000-180177

Non-CPI Secondary Accession Numbers: N2000-445482

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.